

COMMERCIAL TUMBLE DRYER



MODELS AVAILABLE

GZZ15E

GDZ15E

GZZ20E

GDZ20E

COMPACT DESIGN SPACE SAVING

More machines can be installed in limited space to increase efficiency. Fully electromagnetic control thus no compressed air is needed to run the machine.

SAFE AND LARGE LOADING DOOR

Oversized door at ergonomic height for easy loading and unloading. Safety switch will stop the basket rotation when the door is opened to prevent any accident.

REVERSIBLE STAINLESS STEEL BASKET

All dryers come standard with reversible basket to prevent tangling of linen. High quality basket made of stainless steel gives maximum protection to fabrics. Why pay extra to others expensive option.

USER FRIENDLY COMPUTER CONTROL

Say good bye to outdated dual timer control. All dryers come standard (not expensive option) with computer control of 5 individual programs control the drying temperature/time and cool down temperature/time for different type of fabrics.

ROBUST FOR COMMERCIAL USE

You investment will be protected by long lasting CAD designed structural for commercial use. All components have been selected base on commercial usage criterion, not simply modification from household washing machine.

DRY FAST ENERGY SAVING

Minimal clearance between basket and outer drum direct all heated air pass thru the linen in the basket at scientifically designed air flow for optimum drying. Heat isolated material is applied on the outer drum prevent waste heat emission. Silicon gasket seals the door completely prevents air leaking and energy waste.

EASY MAINTENANCE

Double belts speed reduction mechanism eliminates the old fashion troublesome speed reduction gearbox. Lint box in drawer design ensure large filtration area and easy to clean daily, keep the machine at highest performance.

EXTRA SAFETY FOR ELECTRICAL HEATER

A flap switch designed on electrical heated machine to stop the electrical heater when there is no air flow and electronic temperature controller. The electrical heater will last longer without overheating.


PREMIUM QUALITY AT AFFORDABLE PRICE SINCE 1986



TECHNICAL SPECIFICATIONS

	GZZ15E	GDZ15E	GZZ20E	GDZ20E
Rated Capacity	15kg		20kg	
Heating Mode	Steam	Electric	Steam	Electric
Basket Volume	322L		400L	
Basket Diameter	800mm		940mm	
Basket Depth	640mm		600mm	
Door Opening Diameter	610mm		610mm	
Drive Motor	0.37kw		0.55kw	
Fan Motor	0.37kw		0.55kw	
Electric Heating Power	-	15Kw	-	18Kw
Steam Consumption	33kg/h	-	45kg/h	-
Electric Consumption	0.8Kwh	15.8Kwh	1.2Kwh	19.2Kwh
Net Weight	240kg		320kg	

* Consumption may vary depends on actual condition

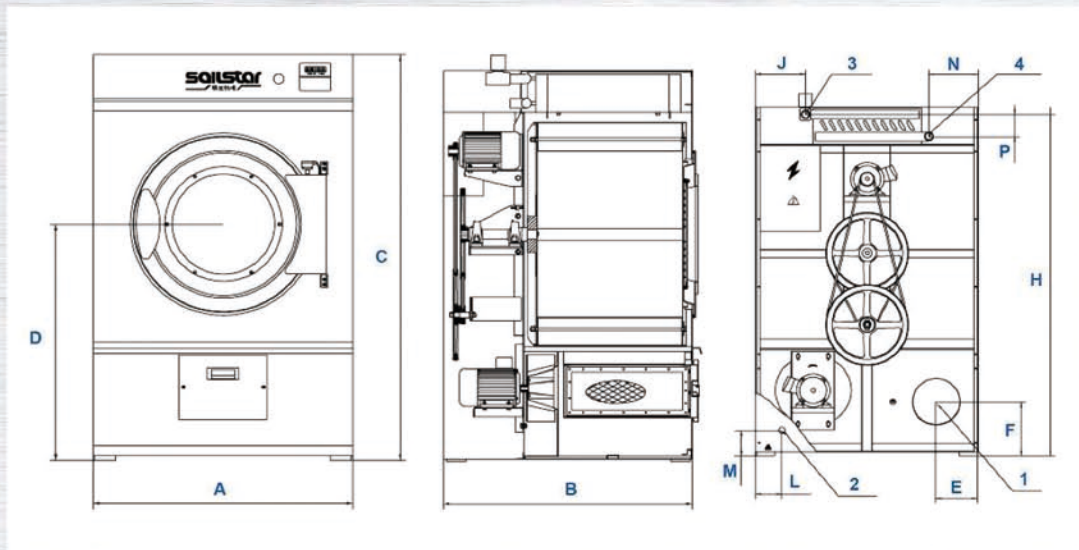

DIMENSIONS

	A	B	C	D	E	F	G	H	J	K	L	M
GZZ15E	860	1065	1640	950	160	310	1500	240	85	100	240	103
GDZ15E	860	1065	1640	950	160	310	-	-	85	100	-	-
GZZ20E	1030	1080	1690	1000	195	255	1616	365	85	100	365	103
GDZ20E	1030	1080	1690	1000	195	255	-	-	85	100	-	-

CONNECTIONS

	1	2	3	4
	Exhaust Duct	Electrical Cable	Steam Inlet	Steam Outlet
GZZ15E	200mm	30mm	DN20	DN20
GDZ15E	200mm	30mm	-	-
GZZ20E	200mm	30mm	DN20	DN20
GDZ20E	200mm	30mm	-	-

We reserve the rights to change the specifications without prior notice