

INDUSTRIAL TUMBLE DRYER



MODELS AVAILABLE

GZZ-30GII

GZZ-50GII

GZZ-70GII

GZZ-100GII



SAFE AND LARGE LOADING DOOR

Oversized door at ergonomic height for easy loading and unloading. Safety switch will stop the basket rotation when the door is opened to prevent any accident.

REVERSIBLE STAINLESS STEEL BASKET

All dryers come standard with reversible basket to prevent tangling of linen. High quality basket made of stainless steel gives maximum protection to fabrics. Why pay extra to others expensive option.

USER FRIENDLY COMPUTER CONTROL

Say good bye to outdated dual timer control. All dryers come standard (not expensive option) with computer control of 5 individual programs control the drying temperature/time and cool down temperature/time for different type of fabrics.

LONG LASTING INDUSTRIAL DESIGN

Independent frame and panel construction ensure reliability. The shaft and bearing housing designed in reference to washer extractor guarantee the machine is built to last.

DRY FAST ENERGY SAVING

Powerful gas heater provides efficient heat to dry. Minimal clearance between basket and outer drum direct all heated air pass thru the linen in the basket at scientifically designed air flow for optimum drying. Heat isolated material is applied on the outer drum prevent waste heat emission. Silicon gasket seals the door completely prevents air leaking and energy waste.

EASY MAINTENANCE

Double belts speed reduction mechanism eliminates the old fashion troublesome speed reduction gearbox. Lint box in drawer design ensure large filtration area and easy to clean daily, keep the machine at highest performance.


EXTRA SAFETY FOR GAS HEATER

A flap switch designed on gas heated machine to stop the gas heater when there is no air flow.

TECHNICAL SPECIFICATIONS

	GZZ-30GII	GZZ-50GII	GZZ-70GII	GZZ-100GII
Rated Capacity	30kg	50kg	70kg	100kg
Heating Mode	Gas	Gas	Gas	Gas
Basket Diameter	940mm	1150mm	1270mm	1450mm
Basket Depth	930mm	970mm	1120mm	1250mm
Basket Volume	645L	1008L	1419L	2065L
Door Opening	610mm	820mm	820mm	820mm
Drive Motor	0.75kw	1.1kw	1.5kw	2.2kw
Fan Motor	1.1kw	1.5kw	2.2kw	3kw
Exhaust Air Flow	2200m3/h	3000m3/h	3600m3/h	6300m3/h
Gas Consumption	2.62kg/cycle	4.38kg/h	6.13kg/cycle	8.76kg/h
Electric Consumption	2Kwh	2.7Kwh	3.8Kwh	5.2Kwh
Net weight	750kg	900kg	1200kg	1400kg

* Consumption may vary depends on actual condition

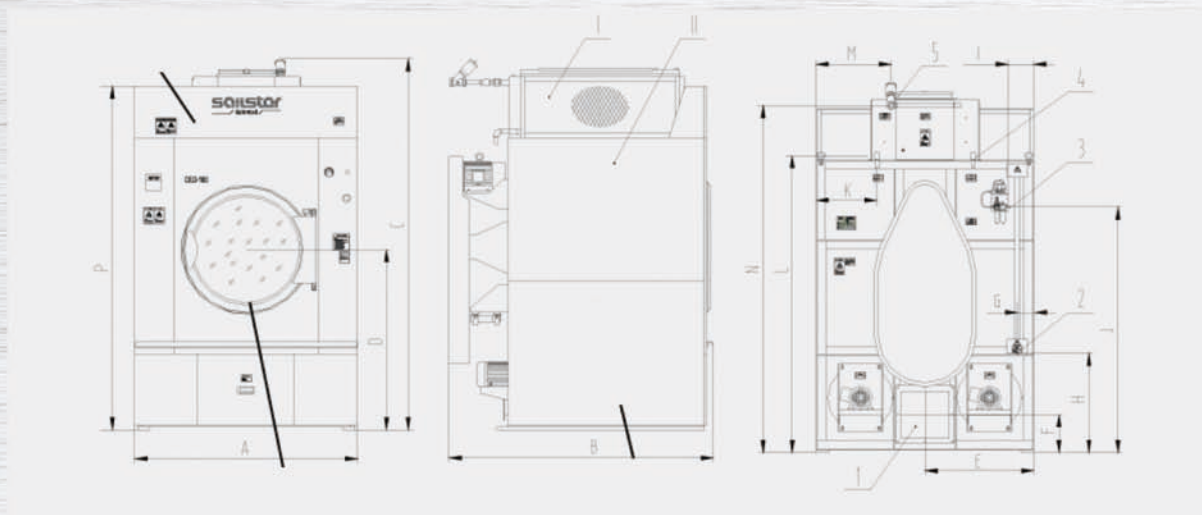

DIMENSIONS

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P
GZZ-30GII	1150	1505	2020	1000	205	360	110	610	235	1435	460	1655	345	1835	1940
GZZ-50GII	1400	1600	2220	1200	275	510	140	720	295	1650	540	1870	430	2045	2150
GZZ-70GII	1500	1780	2400	1250	325	510	140	720	345	1705	530	1990	510	2235	2260
GZZ-100GII	1630	1923	2650	1340	255	455	1450	1565	460	2045	560	2230	535	2475	2565

CONNECTIONS

	1	2	4
	Exhaust Duct	Electrical Cable	Gas Inlet
GZZ-30GII	250mm	30mm	10mm
GZZ-50GII	300mm	30mm	10mm
GZZ-70GII	300mm	30mm	10mm
GZZ-100GII	310mm	27mm	10mm

We reserve the rights to change the specifications without prior notice

Shanghai Sailstar Machinery Group Co. Ltd.
1 Fengpu Avenue, Fengpu Industrial Zone,
201400 Shanghai, P.R. China

Tel: 86-21-67100168
Fax: 86-21-67100167
Email: info@sailstar.com.cn
Website: www.sailstar.com.cn